


ADAPTER - PHOENIX MOUNT SYSTEM

DP to GP Adapter

The P6DGP adapter is designed to mount both a differential pressure (DP) transmitter and a gauge pressure (GP) transmitter on the same set of instrument taps. The adapter incorporates a 3/8" bore for the DP transmitter, a 1/4" calibration port for the GP transmitter and a 3/16" bore isolation valve.

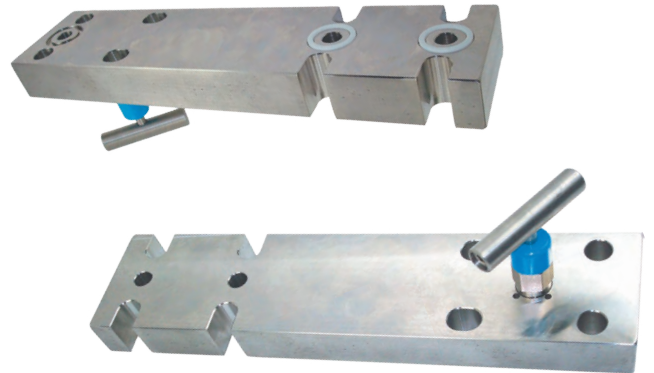

Standard Features


Hydrotested at 150% of rated pressure (shell test). Nitrogen gas tested to 2000 psi.



Seat tightness (zero leakage) verified to 110% of rated pressure. Nitrogen gas tested to 2000 psi.



Packing below stem threads



Metal body-to-bonnet seals are in compression, not tension



Stem threads are rolled, not cut



8 RMS stem finish



V-Style Teflon™ packing



Pressure component materials sourced from the US, Canada or Europe



Benefits

Complies with ASME B31.1 & B31.3 shell testing procedures as standard. Ensures structural integrity of valve.

Complies with ASME B31.1 & B31.3 seat testing procedures as standard. Ensures zero leakage at seats for proper calibration.

Prevents corrosion of critical stem threads

Mitigates risk of stress cracking

Higher quality stem for longer service life


Extended packing life

30-40% less operational torque and less frequent packing adjustments than traditional Teflon™ packed valves

Reliable material traceability. MTR's provided with every order for pressure containing components.

P6DGP™ DP to GP Adapter Technical Specifications

Adapter without Manifold

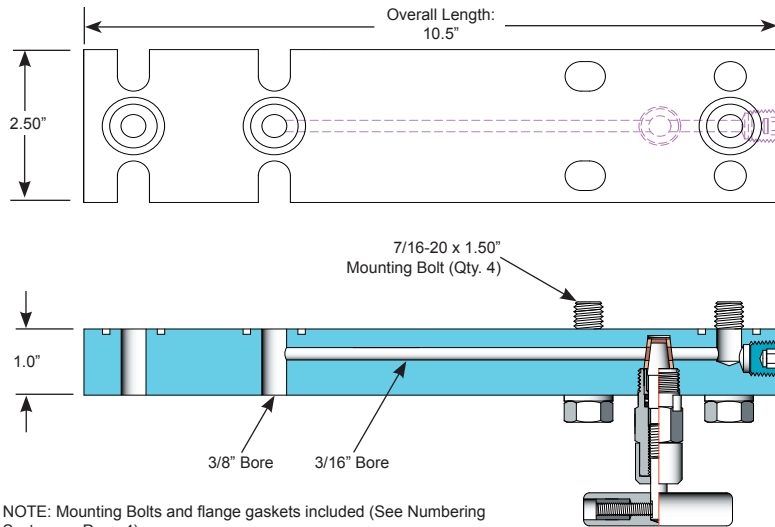


NOTE: Mounting Bolts and flange gaskets included (See Numbering System on Page 4)

Specifications:

Type: **P6DGP6S** Adapter, Roddable Pattern
 Rating: Up to 6000 psi @ 100°F
 (41370 kPa @ 38°C)
 Stem: Tapered Plug Tip
 Packing: Aflas™, Viton™ O-ring, Teflon™
 Seat: Delrin™ or Peek™
 Handle: Removable
 Bore Size: 3/8" for DP, 3/16" for GP
 Inlet Connections: Flange
 Outlet Connections: Flange
 Vent/Calibration Port: 1/4" FNPT (includes 1/4" Pipe Plug)
 Bonnet Lock: Pin or Plate
 Body Stock: 10.5 x 2.5 x 1.0"
 Weight: 6.72 lbs
 Special Service: O₂ or CL cleaning available*

*Other specifications or services may be available

Adapter with Manifold

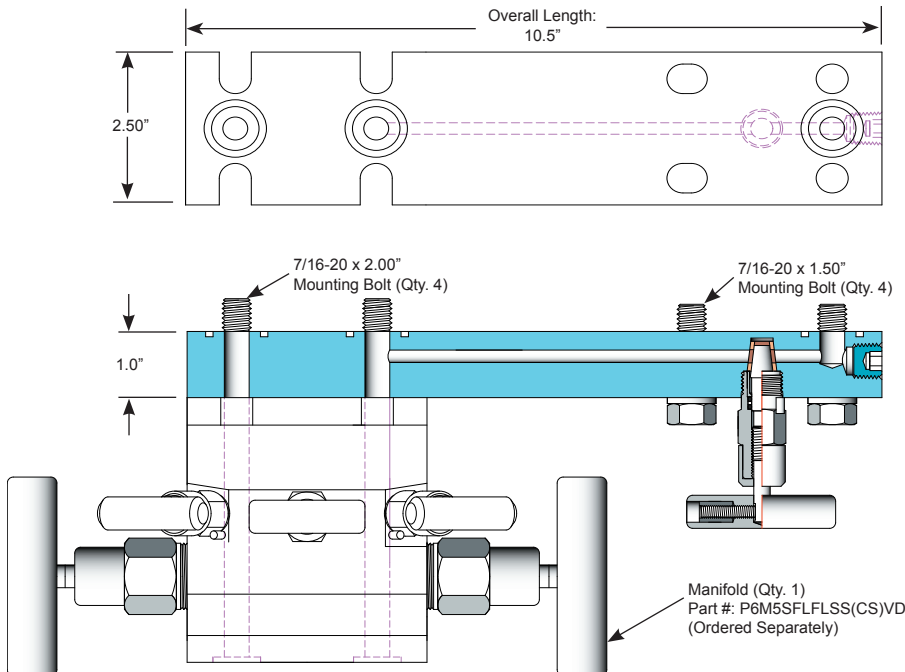


NOTE: Mounting Bolts and flange gaskets included (See Numbering System on Page 4)

Specifications:

Type: **P6DGP6M5S** Adapter with Manifold, Roddable Pattern
 Rating: Up to 6000 psi @ 100°F
 (41370 kPa @ 38°C)
 Stem: Tapered Plug Tip
 Packing: Aflas™, Viton™ O-ring, Teflon™
 Seat: Delrin™, Peek™ and Tefzel™ (Manifold only)
 Handle: Removable
 Bore Size: 3/8" for DP, 3/16" for GP
 Inlet Connections: Flange
 Outlet Connections: Flange
 Vent/Calibration Port: 1/4" FNPT (includes 1/4" Pipe Plug)
 Bonnet Lock: Pin or Plate
 Body Stock: 10.5 x 2.5 x 1.0"
 Weight: 14.81 lbs
 Special Service: O₂ or CL cleaning available*


*Other specifications or services may be available

Note: Refer to PPL-CAT-P6M5S-001 for the specifications of the manifold




O-Ring Bonnet Assembly

Standard Materials					
Valve	Body	Bonnet	Stem	Insert	Handle
CS	ASTM A108CS	ASTM A108CS	ASTM A582 303SS	ASTM A108CS	ASTM A108CS
SC	ASTM A105CS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS
316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS

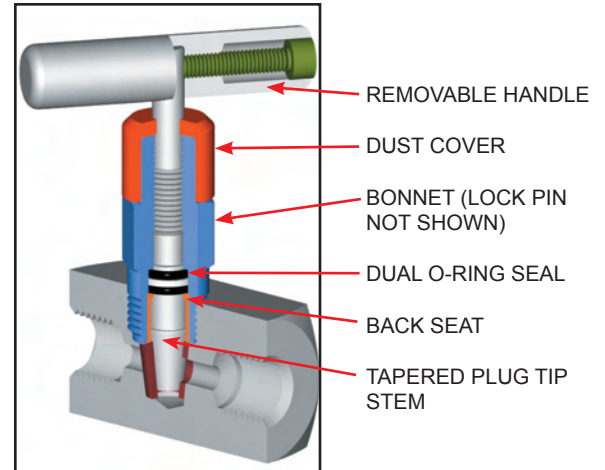


Teflon™ Bonnet Assembly


Standard Materials					
Valve	Body	Bonnet	Stem	Insert	Handle
CS	ASTM A108CS	ASTM A108CS	ASTM A582 303SS	ASTM A108CS	ASTM A108CS
SC	ASTM A105CS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS
316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS

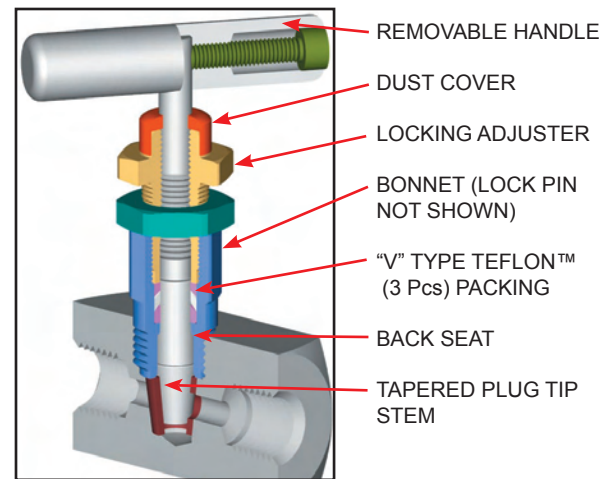

Stem and Seat Configurations




O-ring Bonnet with Soft Seat



Teflon™ packed bonnet with Soft Seat

Pressure vs. Temperature Chart 6000 psi (Soft Seat)

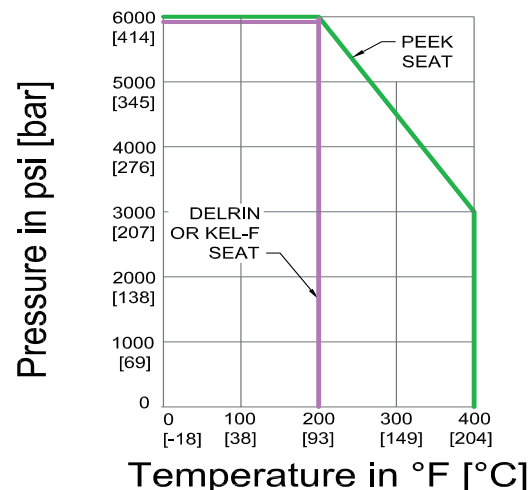

Note: Packing material ratings based on manufacturer's specifications. Approximations only. Phoenix does not represent these values as finite. They are provided only as representative values.

P6DGP™ DP to GP Adapter Model Numbering System

Phoenix	Orifice Size	Type	Inlet Type	Outlet Type	Material	Packing	Seat
P	6=3/8"	DGP6S	FL=Flange	FL=Flange	SS=ASTM A182 316/316L	A=Aflas™	D=Delrin™
					SC=ASTM A105 CS	V=Viton™ (FKM)	P=Peek™
					CS=ASTM A108 CS	T=Teflon™ (PTFE)	Z=Tefzel™ (Manifold Only)
EXAMPLE: P6DGP6SFLFLSSVD = Phoenix, 3/8" Orifice, ΔP TO ΔP Adapter, Flange x Flange, 316SS material, FKM O-ring Bonnet, Delrin™ Seat							
P	6	DGP6S	FL	FL	SS	V	D
Includes Mounting Kit: Bolting see blew bolt code options chart Teflon Flange Gasket, Qty. 3 Note: Standard Bolting Options , CS - carbon steel, Gr.8, zinc plated bolts; SS - stainless steel, 18.8 (304SS) bolts.							

Option Codes	Description
OR	O-Ring Flange Seals
CC	Chlorine Clean
OC	Oxygen Clean
S6	1.50" 316SS Bolts
275CS	2.75" CS Bolts
275S4	2.75" 304SS Bolts
275S6	2.75" 316SS Bolts
B7	AISI 4140/4142 QT
B8C1	Class 1, 304SS, ST
B8MC1	Class 1, 316SS, ST
B8C2	Class 2, 304SS, ST, SH
B8MC2	Class 2, 316SS, ST, SH

Bolting Information:

- B7, B8C1, B8MC1, B8C2, B8MC2 are code grades to ASTM A193;
- To specify code grade bolting, example: 225B7, indicates 2.25" bolt length; B7 grade, alloy steel, AISI 4140/4142
- QT**-Quenched & Tempered; **ST**-Carbide Solution Treated; **SH**- Strain Hardened

Bolt Code Options

Delta P Side	Gauge Side
Blank = No Bolts	Blank = 1.5" Bolts
-D200 (CS, S4, S6) = 2" bolts for use with standard transmitters when correct length bolts not ordered with manifold	Carbon steel bolts standard with CS manifolds, 304 SS bolts standard with 316 SS manifolds, 316 SS bolt = S6 option
-D325 (CS, S4, S6) = 3.25" bolts for use with Rosemount coplanar style transmitters when correct length bolts not ordered with manifold	-G275(CS, S4, S6) = 2.75" bolts for use with Rosemount coplanar style transmitters

Use with Confidence, Phoenix Precision Products Meet the Following Specifications:

- ✓ ASME B31.1 Power Piping
- ✓ ASME B31.3 Process Piping
- ✓ ASME B16.34 Valves - Flanged, Thread, and Welding End
- ✓ API 598 Valve Inspection and Testing
- ✓ MSS SP-25 Standard Marking Systems for Valves, Fittings and Flange Unions
- ✓ MSS SP-99 Instrument Valves
- ✓ MSS SP-105 Instrument Valves for Code Applications
- ✓ NACE MR0175/ISO15156 for all 316SS valves and A105CS body/316SS bonnet (SC-Material Code) when in service with less than 50 PPM of chlorides

For further information please contact:



Phoenix Precision Ltd.
2620 21st Street N.E.
Calgary, Alberta T2E 7L3
Phone:(403) 291-3154
Fax: (403) 291-3292
email: phoenix@phoenixprecision.ca
www.phoenixprecisionvalves.com

Phoenix Precision Ltd. (PPL) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. The information contained herein is intended only as a guide to PPL products and services. Individuals using information must exercise independent judgment in evaluating product selection and determining product appropriateness and system requirements. PPL MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, PPL WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. PPL reserves the right to change product designs and specifications without notice.

DELFIN, TEFLON, VITON and TEFLON are registered trademarks (hereinafter referred to as TM) of E.I. Du Pont De Nemours and Company Corporation. PEEK is a registered TM of Whitford Worldwide Company and Whitford B.V. KEL-F is a registered TM of M.W. Kellogg Company. GRAFOIL is a registered TM of High Temperature Materials Inc. and Graftech INC. Corporation. AFLAS is a registered TM of Asahi Glass Co. Ltd. Corporation Japan. MONEL and INCONEL are registered TMs of Huntington Alloys Corporation. HASTELLOY is a registered TM of Haynes International, Inc.

© 2010 by Phoenix Precision Ltd. All rights reserved. Material in this brochure or catalogue may not be reproduced in whole or in part, in any form, without written permission from the publisher.

Seal and Seat Material Temperature Rating

Code	Description	MIN. TEMP	MAX. TEMP
A	Aflas™	15°F (-10°C)	400°F (204°C)
V	Viton™	-20°F (-29°C)	400°F (204°C)
T	Teflon™	-65°F (-54°C)	450°F (232°C)
D	Delrin™	-40°F (-40°C)	200°F (93°C)
P	Peek™	-40°F (-40°C)	400°F (204°C)
Z	Tefzel™	-300°F (-185°C)	300°F (150°C)

Distributor / Representative:



Phone: +61-3-9872-5822 Fax: +61-3-9872-5129
E-mail: sales@haldatec.com.au Web Site: www.haldatec.com.au