HIGH-FLOW BACK PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston

Max Rating: 300 bar (4,350 psi)

Max Inlet Control: 200 bar (2,900 psi)

Cv 7.0



INTRODUCING THE BP-HF251...

The BP-HF251 is a piston-sensed high-flow back pressure regulator for gas or liquid applications. The liquid version includes a Tecasint® seat, whilst the gas version features PEEK™ seating.

With a balanced main valve as standard it provides stable control with a high level of accuracy under varying inlet pressures. Plus, its high flow coefficient ensures the BP-HF251 can also cope with higher flow rates.

SPECIFICATION

Max. Rating	300 bar (4,350 psi)
Max. Inlet Control	Up to 200 bar (2,900 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	12kg (26.5lbs)

^{*} Pressure regulator rating may be limited by connection type, Cv and/or seat material

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	AISI 316/316L Stainless Steel
	(UNS S31600/S31603)
Main Valve Pin	AISI 316/316L Stainless Steel
	(UNS S31600/S31603)
Soft Seat	Tecasint® or PEEK™
Valve Spring	AISI 302 S26 Stainless Steel
Piston	AISI 316/316L Stainless Steel
	(UNS S31600/S31603)
O-Rings	NBR or FKM/FPM
Loading Spring	Alloy Spring Steel

FEATURES AND BENEFITS

1 PISTON SENSING ELEMENT

Perfect for use in challenging conditions.

SUITABLE FOR GAS OR LIQUID **APPLICATIONS**

> Versatile useage across a range of media-types.

HIGH FLOW COEFFICIENT

> CV 7.0 for high-flow capabilities.

BALANCED MAIN 4 VALVE DESIGN

> Offers seat load reduction which extends time before routine service is required.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com



HIGH-FLOW BACK PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston


Max Rating: 300 bar (4,350 psi)

Max Inlet Control: 200 bar (2,900 psi)

Cv 7.0

DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 1" NPT option - please contact the office for additional connection options.

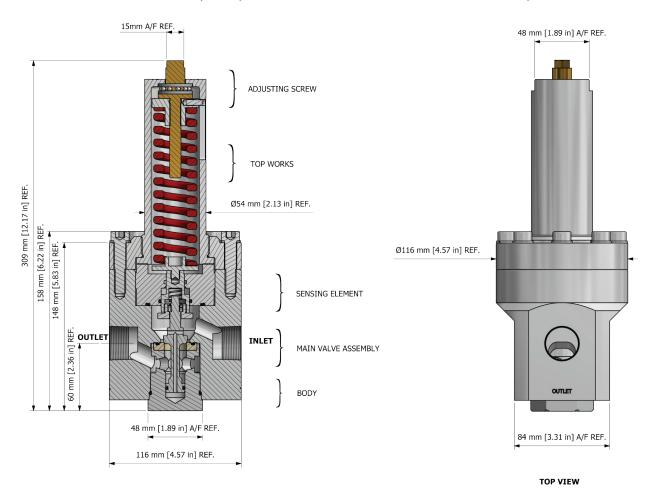





All gauge ports are 1/4" NPT as standard.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





sales@pressure-tech.com

W www.pressure-tech.com



HIGH-FLOW BACK PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston

Max Rating: 300 bar (4,350 psi)


Max Inlet Control: 200 bar (2,900 psi)

Cv 7.0

FLOW CURVE

Please contact the office for further information.

PORTING CONFIGURATIONS

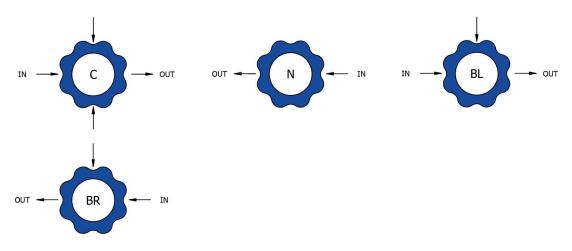

Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





HIGH-FLOW BACK PRESSURE REGULATOR



Gas Liquid

DiaphragmPiston


Max Rating: 300 bar (4,350 psi)

Max Inlet Control: 200 bar (2,900 psi)

Cv 7.0

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

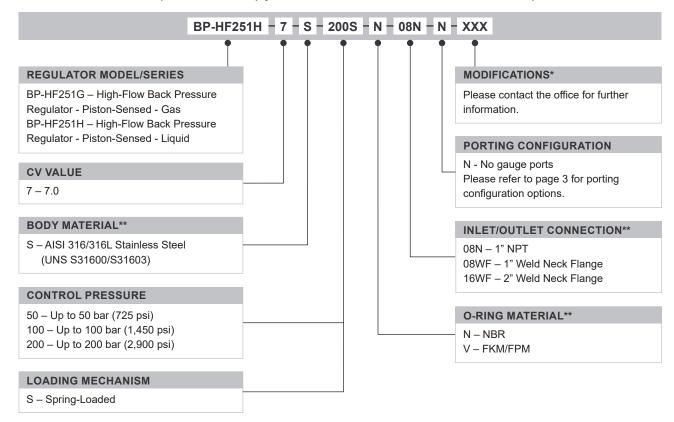

PEEK™ is a trademark of Victrex PLC Tecasint® is a registered trademark of Ensinger GmbH

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements







Where applicable

 $^{^{\}star\star}$ Other materials/connections may be available - please contact the office