

LF691 Datasheet

LOW-FLOW PRESSURE REGULATOR



● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Vent ● Non-Vent | Max Inlet: 1,380 bar (20,000 psi) | Max Outlet: 1,380 bar (20,000 psi) | Cv 0.05/0.1



INTRODUCING THE LF691...

The LF691 is a piston-sensed low-flow reducing regulator with ceramic seating to provide the ultimate protection against the harsh service encountered on water-based hydraulic applications such as water glycol. In addition, the LF691 offers a plug design for supply above 690 bar (10,000 psi).

Its unique seating cartridge ensures the main valve is fully supported during operation to prevent 'chattering'. The LF691 is supplied with a segregated captured vent to prevent deterioration to the loading mechanism and allowing media to be piped off to the return tank.

SPECIFICATION

Max. Rated Inlet Pressure	1,380 bar (20,000 psi)
Outlet Ranges	Up to 1,380 bar (20,000 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	4.8kg (10.6lbs)

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	ASTM A479 316/316L Stainless Steel (UNS S31600/S31603)
	ASTM A479 17-4 Stainless Steel (UNS S17400)
Main Valve Pin	ASTM A479 316/316L Stainless Steel Ceramic (Zirconia)
Seat	Ceramic (Zirconia)
Valve Spring	ASTM A240 301 Stainless Steel (UNS S30100)
Piston	ASTM A479 316/316L Stainless Steel
Handwheel	Nylon or T-Bar
O-Rings	NBR N70 (Nitrile Buna N)
	FKM/FPM (Viton)
	HNBR (Hydrogenated NBR)
Loading Spring	Silicon Chrome Wire

Note: Pressure regulator rating may be limited by connection type, Cv and/or seat material. Contact the office for specific pressure or temperature requirements.

FEATURES AND BENEFITS

1 CERAMIC SEATING DESIGN

Provides the ultimate protection against cavitation on hydraulic services.

2 FULLY SUPPORTED MAIN VALVE

Provides a dampening action to prevent 'chattering'.

3 SEGREGATED CAPTURED VENT

Prevents deterioration to loading mechanism and allows media to be piped off to return tank.

4 EASY ACCESS TO SEAT CARTRIDGE

Simplified servicing through base of regulator.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2024 Pressure Tech Ltd. All Rights Reserved.

270824

PAGE:
1 OF 4

LF691 Datasheet


LOW-FLOW PRESSURE REGULATOR



● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Vent ● Non-Vent | Max Inlet: 1,380 bar (20,000 psi) | Max Outlet: 1,380 bar (20,000 psi) | Cv 0.05/0.1

DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 3/8" MP option and standard configurations only - contact the office for other options. LF691 design (and dimensions) changes at 1,380 bar (20,000 psi) control pressure to T-Bar adjustment with a long bonnet.

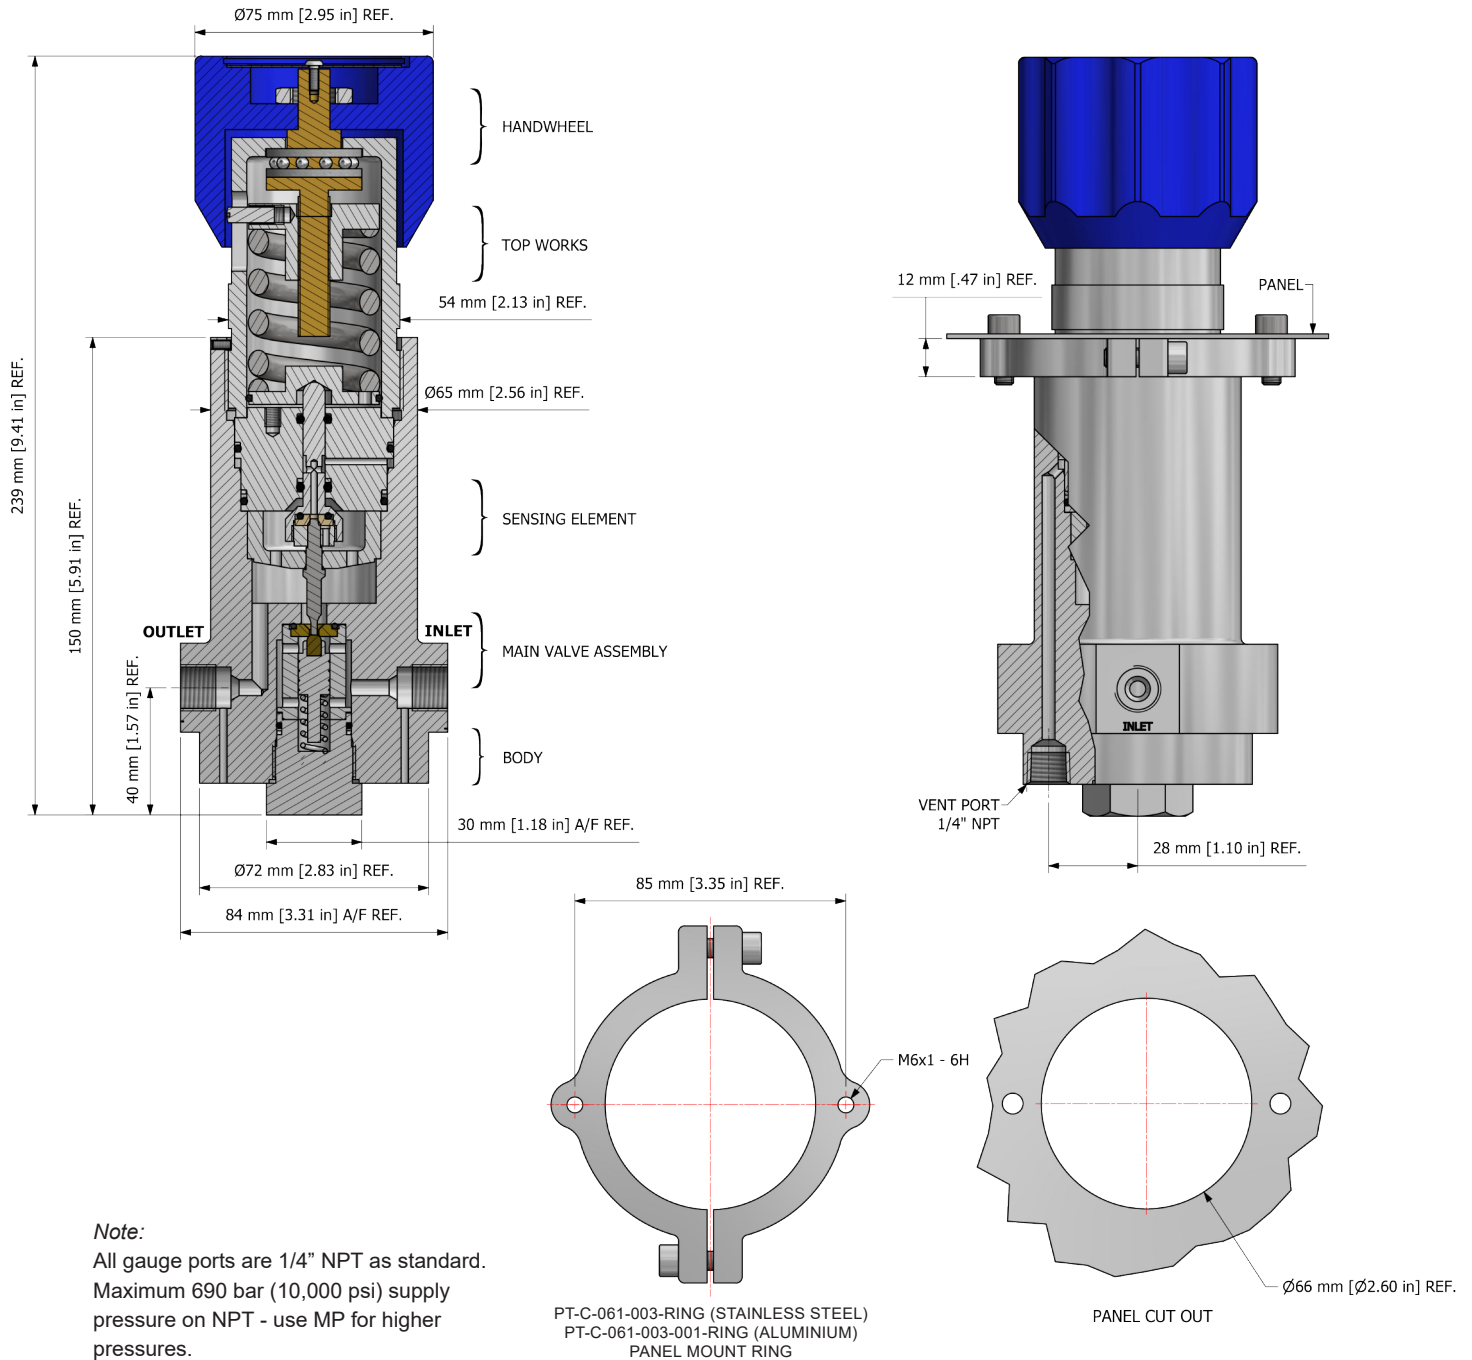

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2024 Pressure Tech Ltd. All Rights Reserved.

270824

PAGE:
2 OF 4

LF691 Datasheet

LOW-FLOW PRESSURE REGULATOR




● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Vent ● Non-Vent | Max Inlet: 1,380 bar (20,000 psi) | Max Outlet: 1,380 bar (20,000 psi) | Cv 0.05/0.1

FLOW CURVE

Please contact the office for further information.

PORTING CONFIGURATIONS

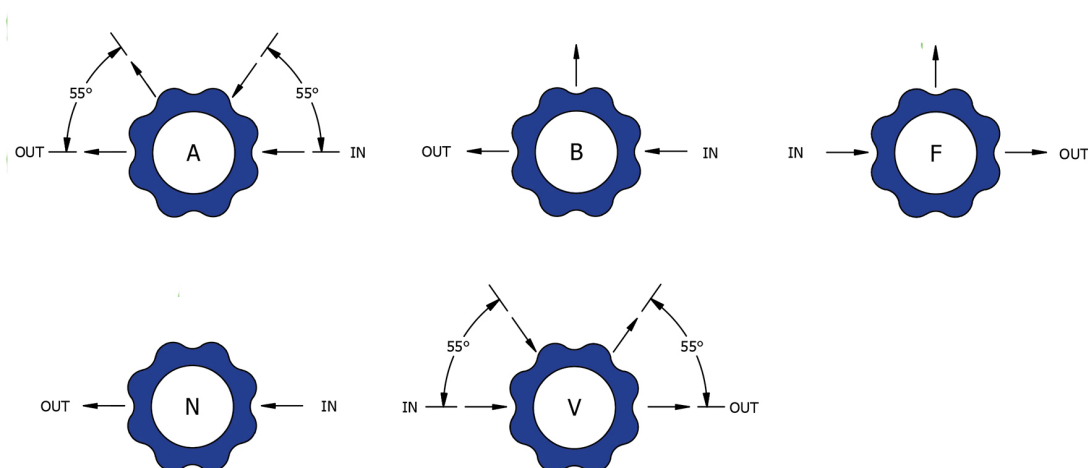

Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues.
Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2024 Pressure Tech Ltd. All Rights Reserved.

270824

PAGE:
3 OF 4

LF691 Datasheet

LOW-FLOW PRESSURE REGULATOR



● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Vent ● Non-Vent | Max Inlet: 1,380 bar (20,000 psi) | Max Outlet: 1,380 bar (20,000 psi) | Cv 0.05/0.1

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

LF691	01	S	1034S	N	03A	N	NV	XXX	
REGULATOR LF691	CV VALUE 05 – 0.05 01 – 0.1 (max. inlet 1,034 bar/15,000 psi) 03 – 0.3 (max. inlet 1,034 bar/15,000 psi)*****	BODY MATERIAL ** S – ASTM A479 316/316L Stainless Steel (max. inlet 1,034 bar/15,000psi) R – ASTM A479 17-4 Stainless Steel (max. inlet 1,380 bar/20,000psi)	CONTROL PRESSURE 50 – Up to 50 bar (725 psi) 100 – Up to 100 bar (1,450 psi) 140 – Up to 140 bar (2,030 psi)*** 200 – Up to 200 bar (2,900 psi) 414 – Up to 414 bar (6,000 psi) 600 – Up to 600 bar (8,700 psi)*** 690 – Up to 690 bar (10,000 psi) 1,034 – Up to 1,034 bar (15,000 psi) 1,080 – Up to 1,080 bar (15,665 psi)*** 1,380 – Up to 1,380 bar (20,000 psi)****	LOADING MECHANISM S – Spring-Loaded A – Air-Loaded	MODIFICATIONS* Contact the office for further information.	VENTING SV – Self-Venting (Captured) NV – Non-Venting	PORTING CONFIGURATION N - No gauge ports Refer to page 3 for porting options.	INLET/OUTLET CONNECTION** 02A – 1/4" Medium Pressure 02N – 1/4" NPT† 03A – 3/8" Medium Pressure 03N – 3/8" NPT† 04A – 9/16" Medium Pressure 04N – 1/2" NPT†	O-RING MATERIAL ** N – NBR V – FKM/FPM H – HNBR

OPTIONAL EXTRAS - ANCILLARY EQUIPMENT ALSO AVAILABLE

	PART NUMBER	DESCRIPTION
Service Kit	SRK-LF691...	Various options available
Panel Mounting Ring	PT-C-061-003-RING	Stainless Steel panel mount ring
Panel Mounting Ring	PT-C-061-003-001-RING	Aluminium panel mount ring

* Where applicable

** Other connections/materials may be available

*** Air-loaded only

**** T-Bar adjustment/long bonnet

***** Control pressure ≤ 690 bar (10,000 psi), 'S' body material required

Control pressure > 690 bar (10,000 psi), 'R' body material required

† Max. 690 bar (10,000 psi) supply pressure on NPT
- use MP for higher pressures

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues.
Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2024 Pressure Tech Ltd. All Rights Reserved.

Haldatec

Phone: +61 3 9872 5822

Email: sales@haldatec.com.au

Website: www.haldatec.com.au

270824

PAGE:
4 OF 4